

RAPID[®] Top-2-Roof

For on-roof insulation systems

Characteristics

Cylinder head

- > Reduced splitting so that wood surface does not splinter
- > Improved force transfer thanks to deeper drive

Fast screwing processes

- > Coarse thread rolled out to the tip
- > Low screw-in torque


Lower screw-in resistance

- > The friction part reduces the screw-in resistance by reaming the wood around the shaft

Patented follower thread tip – no pre-drilling necessary

- > Ensures that screw bites quickly with low splitting




Top-2-Roof		
Ø 8.0	Drive	T 40
	Length	240–520 mm
	Thread	Coarse thread
	Underhead	-
	Surface	BlueWin 

Application

- > Approved for hard and soft insulation
- > Optimal for non-pressure-resistant (soft) insulation
- > Especially for on-roof insulation: Absorbs thrust and compression forces
- > The absorption of compression forces causes the insulation not to be pressed into the substrate nearly as much, which improves insulating capacity
- > The second threaded part underneath the screw head keeps the counter batten optimally fixed in place

ON-ROOF AND EXTERIOR WALL INSULATION

- > Counter batten verification incl. screwing
- > Gabled and monopitch roofs
- > Wall insulation 90°

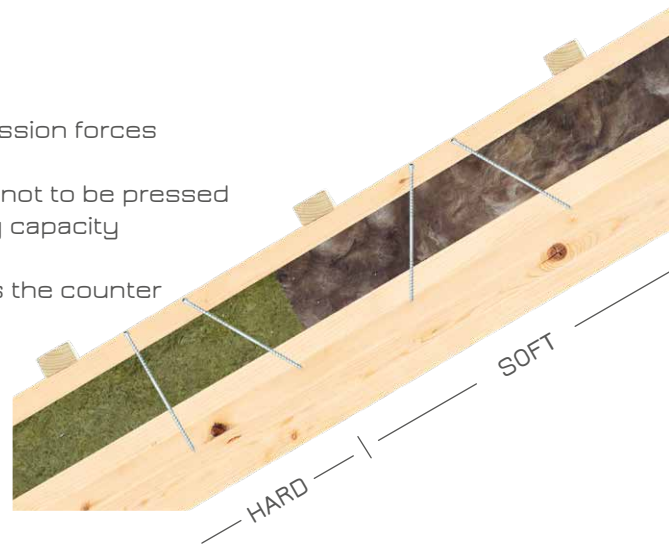

Dimensioning software

- > Easy and intuitive to operate - the EXCEL table calculation program does not require any special software knowledge
- > Takes much less time to calculate
- > Screw types and pre-defined insulations can be selected or you can customise by adding your own insulation
- > The software takes national regulations into account and is available in German, English, French and Italian

